

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			NEW RELEASE	09/05'25	Sun

CUSTOMER DRAWING


RoHS Compliant

LASER WELD POINTS MAY BE DISCOLORED

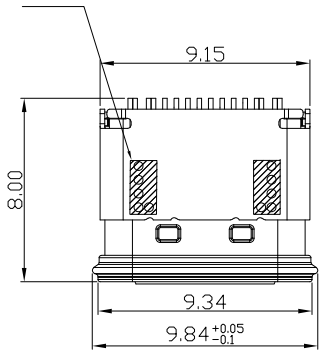

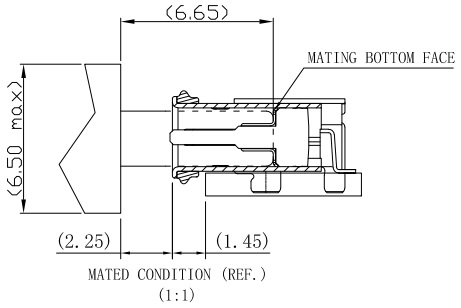

3D VIEW




ORDERING INFORMATION


MCCFT - W1Y2 (XX T)
1 2 3


1 *PRODUCT SERIES:*
USB C TYPE connector – Receptacle (Female) side.


2 *ITEM NO.:*
Right Angle– Single Row SMD 16pin
Body 7.53L/ Waterproof IPX7


3 *GOLD PLATING :*
01: G/F.

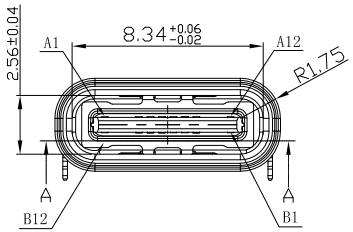


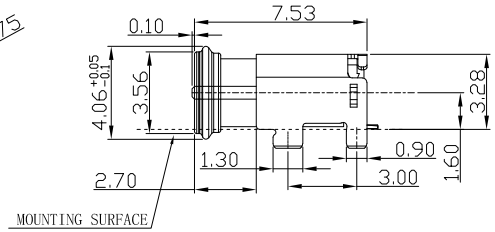

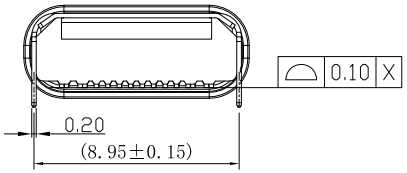


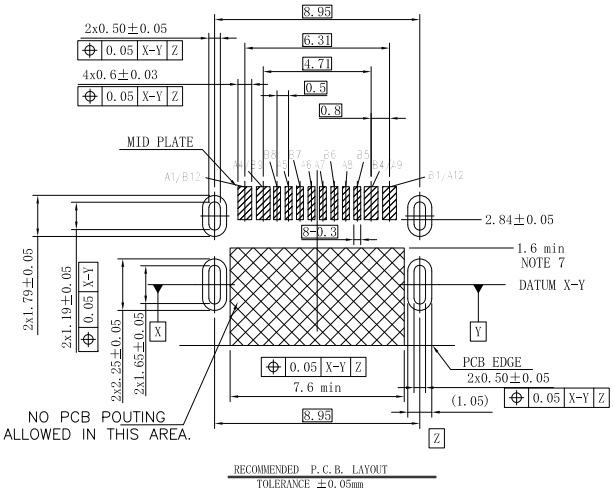





SECTION A-A



NOTES:

1. Material:
   1-1. Housing: High Temp, UL94 V-0, Black color.
   1-2. Contact: Copper Alloy.
   1-3. Mid Plate: Stainless Steel.
   1-4. Shell: Stainless Steel.
   1-5. Waterproof Ring: Silicon.
2. Plating:
   2-1. Contacts: Gold on contact area over Nickel. under plated over all.
   2-2. Shell: Nickel under plated over all.
   2-3. Mid Plate: Clear only.
3. Mechanical performance:
   3-1. Insertion force: 5~20N.
   3-2. Removal force: 8~20N
   3-3. Durability: 10,000 cycles.
4. Electrical performance:
   4-1. Current rating: 5.0A MAX.
   4-2. Voltage:20V MAX
   4-2. Withstanding Voltage: 100V AC
5. Environmental performance:
   5-1. Operation temperature: -40° C~+85° C.
6. Waterproof performance: IPX7.

PIN ASSIGNMENT

PIN NO.	A1&B12	A4&B9	B8	A5	B7	A6	A7	B6	A8	B5	A9&B4	A12&B1
SINGAL NAME	GND	VBUS	SBU2	CC1	DN2	DP1	DN1	DP2	SBU1	CC2	VBUS	GND

DIM	TOL	DIM	TOL
X.X	±0.30	X.X°	±3.0°
X.XX	±0.20	X.XX°	±2.0°
X.XXX	±0.10	X.XXX°	±1.0°

DRAW NO.	MCCFT-W1Y2(A0)	DATE	MATERIAL: SEE NOTES	DRAW NAME:	
DESIGN:	Sun	09/05'25	FINISH: SEE NOTES	*USB C Type CONN – FEMALE Right Angle/ Single Row SMD 16pin / Body 7.53L/ Waterproof IPX7*	
CHECK:	Sun	09/05'25	FILE: MCCFT-W1Y2(A0)	MODEL: USB C TYPE CONN	
REVIEW:	Jeff	09/05'25	P/N: MCCFT-W1Y2(XXT)	UNIT: mm	SHEET: 1/1
APPROVED	Jeff	09/05'25	REV. A0	SCALE	

SUNFUN SUNFUN TECHNOLOGY LTD