

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A1			Update the component with cap	09/16'24	Davis

ORDERING INFORMATION

PD98F - 08V200C G 03

① ② ③ ④

① PRODUCT SERIES

Pogo connector - Female type.

② SPEC NOTES.:

2*4 Pin/ Pitch2.00mm

3.80mm Height/ Vertical

With Cap type

CUSTOMER DRAWING




RoHS Compliant

③ PLATING MATERIAL:

G: Gold(Au).

④ PLATING THICKNESS:

03: 3u"

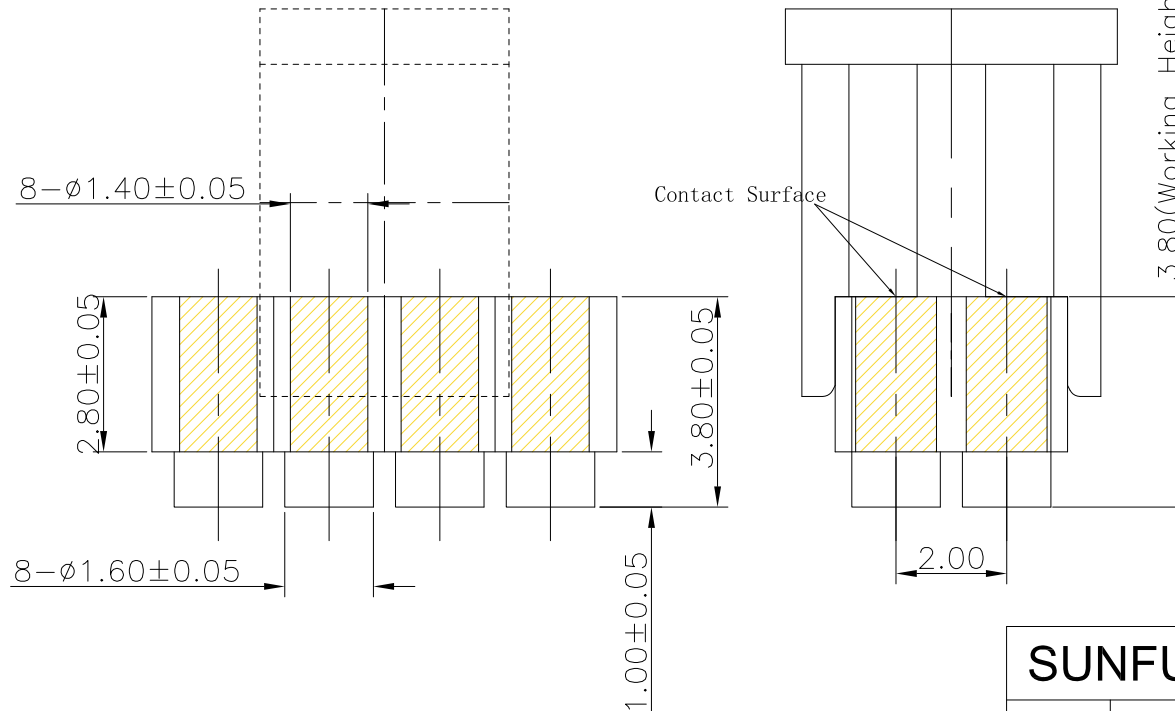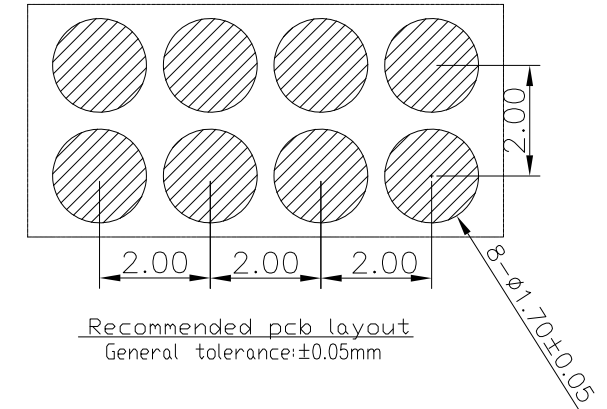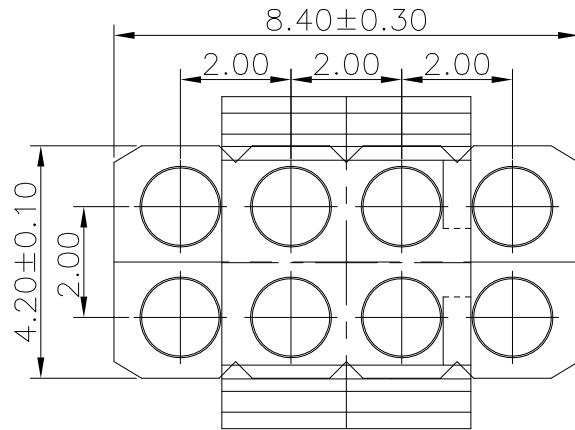

NOTES:

(1)Material:

1. Pin: Copper Alloy.

2. Housing: High Temperature Thermoplastic, UL 94V-0.

(2)Plating:

1. Pin: 3u" Gold plated over Nickel under-plated over all.

(3)Mechanical:

1. Working Height: 3.80 mm.

2. Durability :10,000 cycles Min.

(4)Electrical:

1. Current Rating :1.0A AC/DC max.

2. Voltage Rating :12V AC/DC max.

3. Contact Resistance: 50mΩmax.

SUNFUN		SUNFUN TECHNOLOGY LTD			
DRAW NO.	PD98F-08V200C(A1)	DATE	MATERIAL: SEE NOTES		
DESIGN:	Davis	09/16'24	FINISH: SEE NOTES		
CHECK:	Davis	09/16'24	FILE: PD98F-08V200C(A1)		
REVIEW:	Wilson	09/16'24	P/N: PD98F-08V200CG03		
APPROVED	Wilson	09/16'24	REV. A1	SCALE	
		DRAW NAME:		POGO PIN CONN - FEMALE/VERTICAL	
				PITCH 2.00/ 2*4PIN/ 3.80 Height	
				With Cap type	
		MODEL:		POGO PIN CONN	
		UNIT:	SHEET:		
		mm	1/1		

DIM	TOL	DIM	TOL
X.X	±0.30	X.X'	±3.0'
X.XX	±0.20	X.XX'	±2.0'
X.XXX	±0.10	X.XXX'	±1.0'